



INSTALLATION INSTRUCTIONS

Accessory

SPLASH GUARDS
P/N 08P00-SHJ-100

Application

2005 ODYSSEY

Publications No.


All 27362

Issue Date


SEP 2004

PARTS LIST


Right front splash guard




Left front splash guard



Right rear splash guard



Left rear splash guard



6 Self-tapping screws




2 Spring nuts



2 Round head grommets



2 Square head grommets



TOOL REQUIRED

Stubby Phillips screwdriver

Diagonal cutters

Pushpin


INSTALLATION

NOTE:

- These instructions show the left splash guards being installed. The same procedure applies to installing the right splash guards.
- Clean and wax the areas to be covered with a high-quality paste wax.


Installing the Front Splash Guards

1. Turn the steering wheel all the way counter clockwise to provide access to the left front fenderwell.
2. Remove the two self-tapping screws from the left front inner fender.

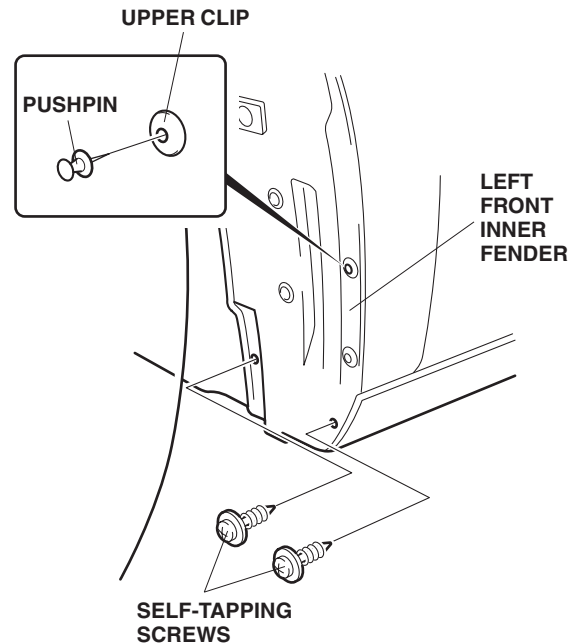

3. Using a pushpin, make a small hole through the center of the upper clip.

- Install the left front splash guard using the two self-tapping screws removed in step 2, and one self-tapping screw supplied with the kit. Do not tighten the self-tapping screws yet.

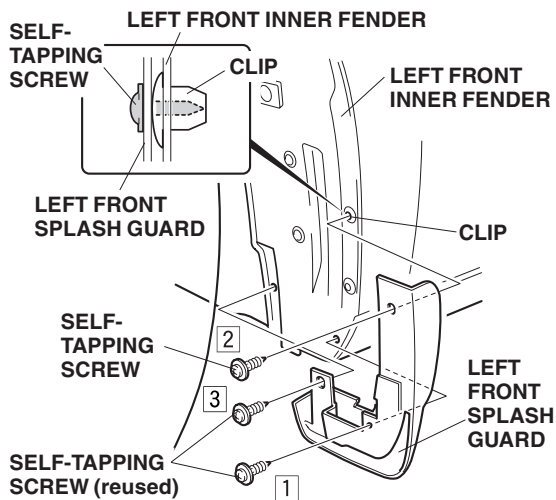


- While holding the left splash guard against the fender, tighten the self-tapping screws in the order shown.
- Turn the steering wheel all the way clockwise and repeat in steps 2 through 4 to install the right front splash guard.


Installing the Rear Splash Guard

If the vehicle is not equipped with a rear inner fender, go to step 13; otherwise, continue with step 7.


- Using a stubby screwdriver, remove the left rear inner fender (three self-tapping screws).

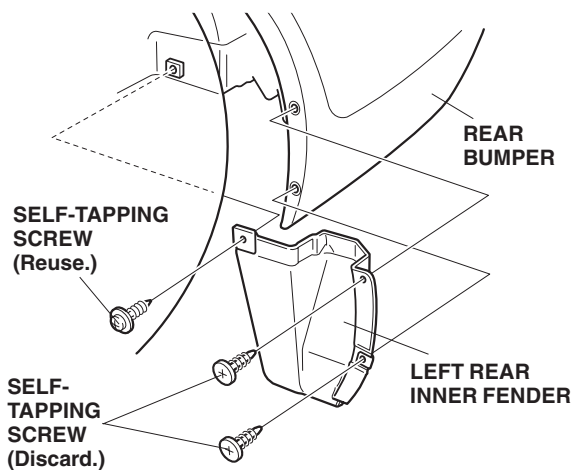


- Using diagonal cutters, cut out the vehicle grommet secured to the vehicle panel.

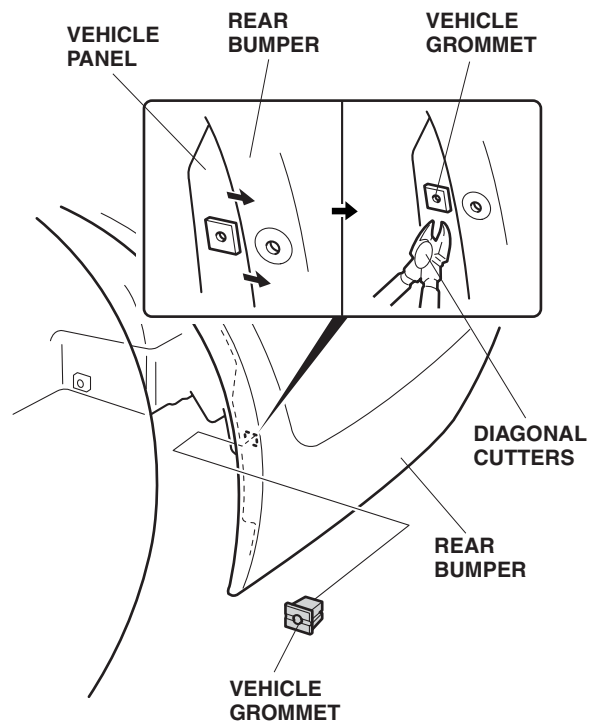

- Install one round head grommet into the hole in the vehicle panel. Slide one spring nut over the lower hole in the rear bumper.

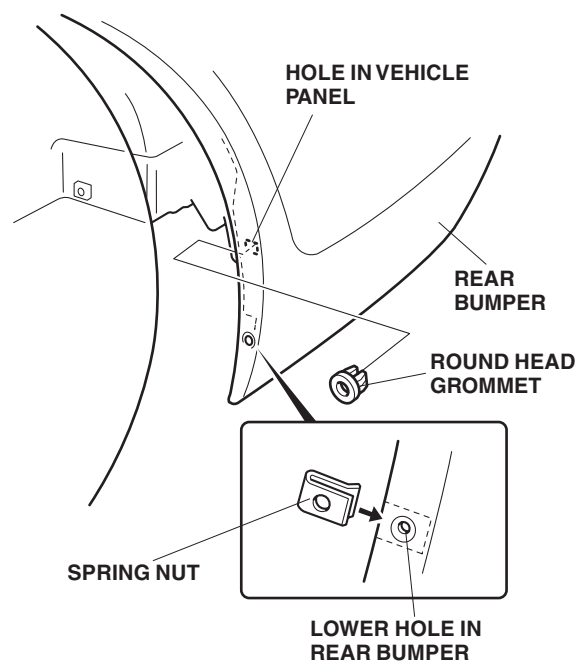


- Position the left rear splash guard on the left rear fenderwell and rear bumper, and loosely install the two self-tapping screws supplied with the kit, and the one self-tapping screw you removed.

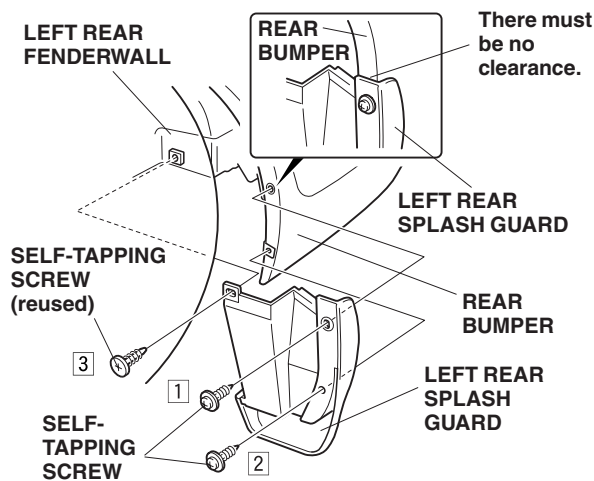

- Hold the left rear splash guard against the fenderwell and check that there is no clearance between the splash guard and rear bumper. Tighten the three self-tapping screws in the sequence shown.
- Repeat steps 7 thru 11 to install the right rear splash guard.


Without an Inner Fender:

- Remove the self-tapping screw from the rear bumper.

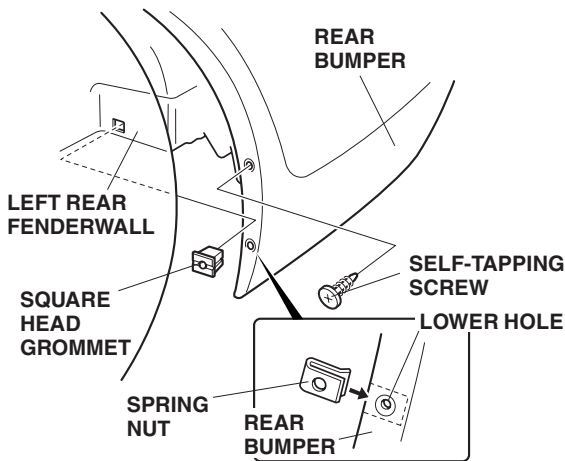

- Install one square head grommet into the hole in the left rear fenderwell. Slide one spring nut over the lower hole in the rear bumper.

- Position the left rear splash guard on the left rear fenderwell and rear bumper, and loosely install the two self-tapping screws supplied with the kit, and one self-tapping screw you removed.

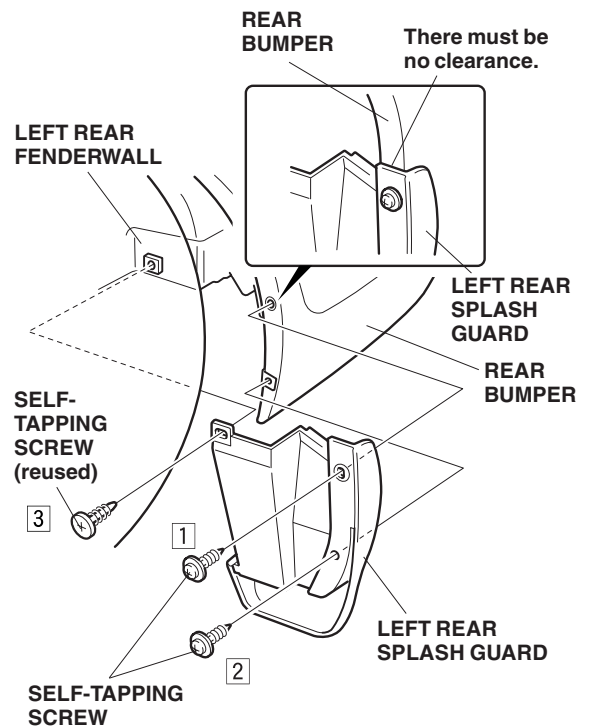

- Hold the left rear splash guard against the fenderwell and check that there is no clearance between the splash guard and rear bumper. Tighten the three self-tapping screws in the sequence shown.
- Repeat steps 13 thru 16 to install the right rear splash guard.